


POSITIONING THE HEADBAND & THE EARTHANGER

- THE EARTHANGER CAN BE SUPPLIED OPTIONALLY.


1. Taking out the headband from the receiver unit.

-Push the receiver unit backward using two thumbs grasping plastic ring by both hands like the picture #1 and it could be easily taken out from the receiver unit. The headband being fastened with plastic ring, when the plastic ring be taken out, the headband would be also set apart accordingly.



2. Assembling the headband with the receiver unit.

-When the plastic ring attach to the receiver unit, do it the above No.1 conversely. The headband being fastened with plastic ring, when the plastic ring be assembled, the headband would be fixed accordingly.



3. Taking the Ear-Hanger out from the receiver unit.


-Grasp the ear-hanger pin and pull it straight up like the picture #2.

4. Assembling the Ear-Hanger into receiver unit.

-Align the protrusion part on the ear-hanger with keyway to the hole in the receiver unit and push the ear-hanger straight into the hole in the receiver unit like the picture #3.

Notice:


Be careful to do it vertically when you take out from the receiver unit or put the ear-hanger into it.



5. Wearing the earhanger

The headset can be worn on either ear. To switch it to fit the other ear, simply turn the microphone boom to other side down and adjust the earhanger.


Put the earhanger on the back of the ear and adjust the hook until the earhanger is resting comfortably on your ear.



INTRODUCTION

Your new HEADSET is a telephone headset that connect to your telephone to allow hands- free, fatigue-free conversation.

Please read this manual carefully that you can quickly enjoy the convenience provided by the following features.

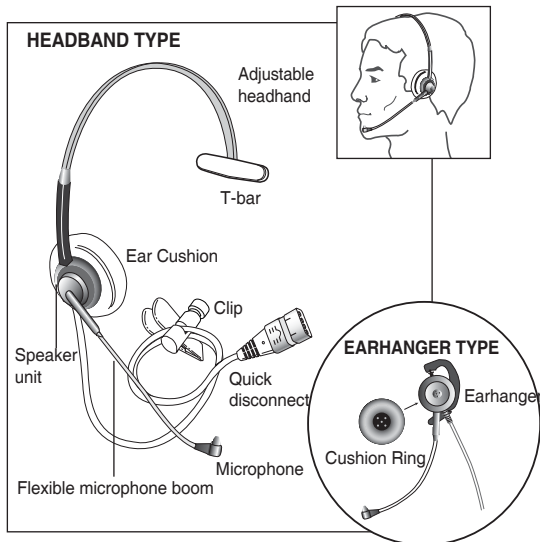


POSITIONING THE HEADSET


1. Adjusting the headband

THE HEADSET CAN BE WORN ON EITHER SIDE OF EAR.
TO SWITCH IT TO FIT THE OTHER EAR, SIMPLY SLIDE THE
MICROPHONE BOOM TO OTHER SIDE.

Using both hands, flex the headband
in or out until the Speaker Cushion(s)
rest with almost no pressure on your
ear(s).




Slide the headband up or down until it
rest on the top of your head and
the Speaker cushion(s) are centered
against your ear(s).



2. Adjusting the Microphone boom


The microphone boom is flexible,
so you can position it for comfort
and best transmission. The ideal
placement for the microphone is
usually at the corner of your mouth,
not in front of it, and about an inch
from your face.

Be sure that the side of the
microphone is pointed toward your
mouth.



3. Adjusting the Clothing Clip


Attach the clothing clip to your
clothing at a comfortable level.
To adjust the clip position, push the
barrel end in and slide the cord
through to provide sufficient slack so
that the headset is not disturbed by
head movements.



4. Quick Disconnect

Some headset models are equipped with a Quick Disconnect Module
which allows you to place a call on hold without removing you headset ,
freeing you to perform a task away from the phone. Your conversation is
quickly resumed by reconnecting the Quick Disconnect.

- Before attempting to use your headset,
be sure that the two quick Disconnect
halves are connected.
- To put your call on hold, grasp the Quick
Disconnect as shown and pull straight
apart.
- To resume your conversation,
reconnect the two halves of the Quick Disconnect.



5. Adjusting the microphone on Noise Cancelling Models(option)

- Do not bend or twist the boom within 1/2" of the microphone or capsule.
- Avoid repeated twisting of the boom.
- Position the Microphone approximately 1/2" from your face in front of the corner of your mouth.
- Make certain to speak into the front of the microphone .
You may need to rotate the microphone in order to position the front of the microphone toward your lips.
- Do not force the microphone arm beyond its limited.